


# 3000 kg EXTRA LOW PROFILE LIFT FOR CARS


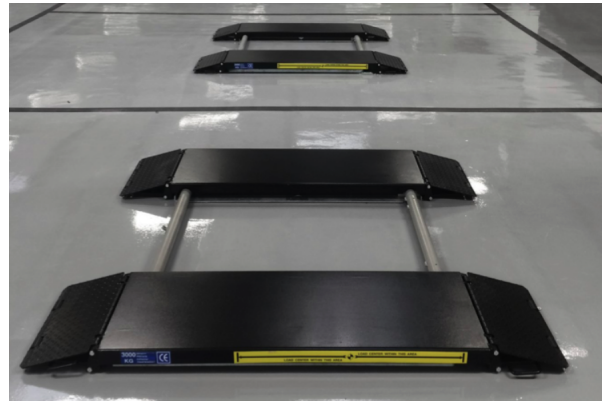


Extra low rise electrohydraulic lift with min. travel 96 cm and double platform. Platforms connected by double torsion beam for perfect synchronicity and levelling.

Double redundant hydraulic circuit with 4 pistons, 2 on each platform, with safety and shut-off valve on the hydraulic circuit for overload protection and hoses breaks. Self-lubricating axle bearings on each rotating

pin, no maintenance required, High- sliding and self-lubricating polyethylene sliding pads. Lowering speed control with compensation valve. "Hold to run" 24V Control.

Electric Micro Switch with "foot guard" device and acoustic signal, to protect the last lowering travel. Suitable for both floor and recessed installation, even under difficult conditions in case of not available deep pits.

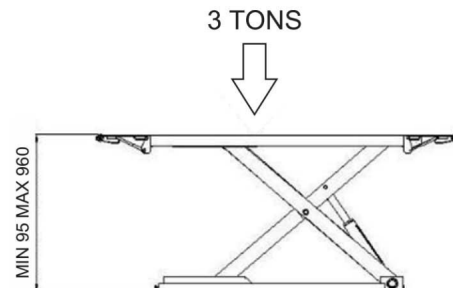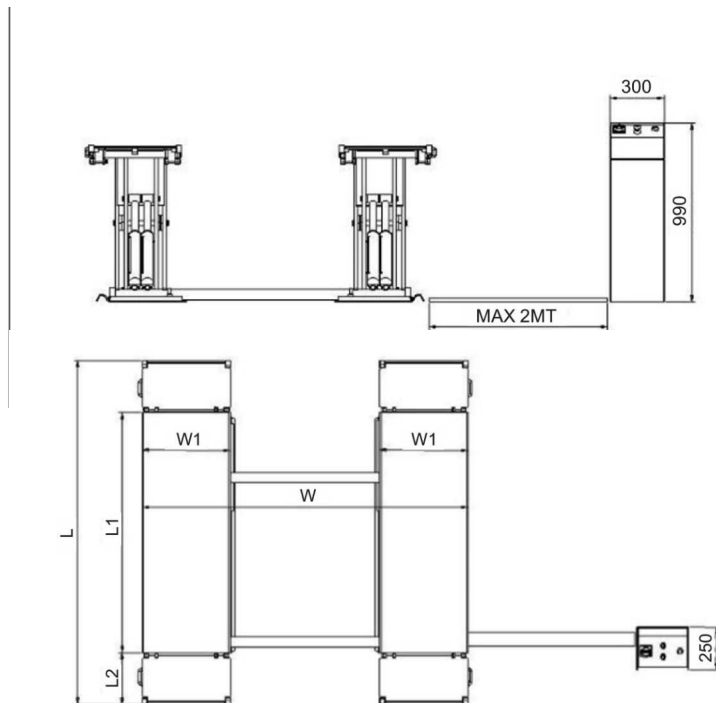

DBLE		
L	LIFT LENGTH	1900
L1	PLATFORM LENGTH	1400
L2	FLAP LENGTH	250
W	LIFT WIDTH	1770
W1	PLATFORM WIDTH	450

**Capacity 3000 kg**  
**Power Unit Kw 1,1 400V 3Ph 50Hz**  
**Total weight 500kg**  
**Lifting height max 960 mm**

**Up-Down Travel speed 20/20sec**  
**Equipped with 4 flap run- up ramps**  
**Hoses covered with anti-blast sheath**  
**Kit of 4 rubber pads h 20mm**



**1-800-465-8575** [www.arslanauto.com](http://www.arslanauto.com)